


MANIJA GIRATORIA VISION LÍNEA ERGONÓMICA



Manija giratoria de perfil bajo utilizada para sistemas de cierre con mecanismo de control y varillas planas. Se utiliza con un cilindro de perfil de 40 mm o equipado con un botón pulsador o inserto con llave-herramienta. El cilindro, el botón o el inserto se encuentran en la base de la manija giratoria, lo que proporciona una forma más ergonómica de operar la manija. La manija está accionada por un resorte y se eleva cuando se desbloquea o se presiona el botón. El cilindro está protegido por una cubierta deslizante antipolvo. Es resistente al agua IP65 según NEMA 4.

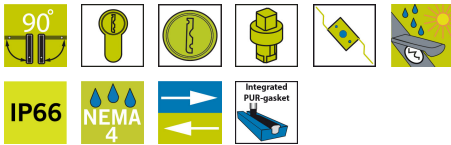

MATERIAL

Dish: Glass fibre reinforced polyamide (PA6GF30)

Dust cover: TPE

Handle: Zinc die cast, silver grey coated

O-ring: NBR

Push button: Glass fibre reinforced polyamide (PA6GF30)

RELATED PRODUCTS

Similar products: 1-005.15

Rod latch systems: 1-008.04, 1-008.05, 1-008.13, 1-008.21, 1-008.25, 1-008.07

Cylinders: 1-209, 1-210, 1-211

Use the Index Code at industriilas.com

TESTS & STANDARDS

Cutout: Version C

Model with profile cylinder:

Turn-to-latch = The door is locked by turning the key.



Model with insert, push-button or round cylinder:

Push-to-latch = Spring loaded cam latches when the handle is pushed in.

T = For door thickness: 0,8-3,5 mm.

* Handle supplied without profile cylinder.

Classifications: IP66, NEMA 4

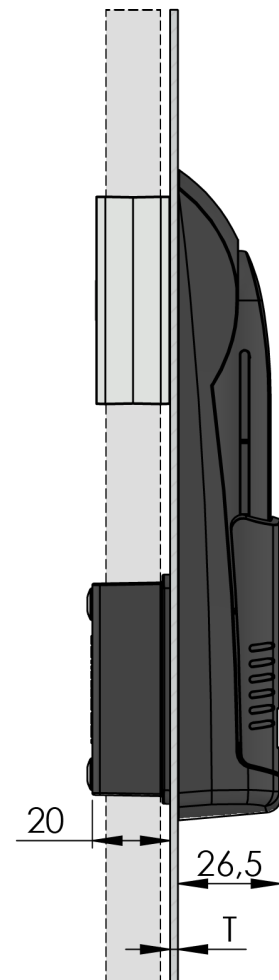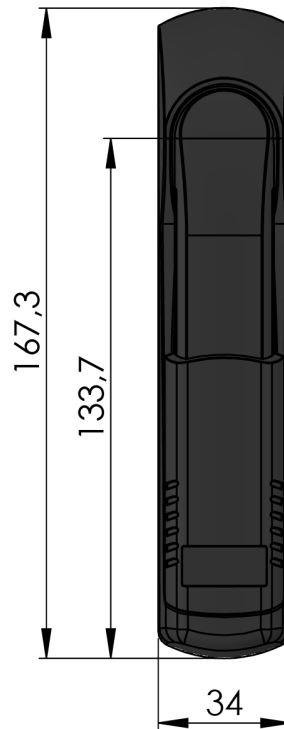

Make your selections in each column to create your article number (AAAA-BBCDE-FF)

AAAA Type	BB Insert / Cylinder	C Surface treatment insert	D Protection degree	E Door thickness	FF Serial Number
1530 Handle for control mechanism	01 Square 6	0 For cylinder and push-button versions	5 IP65	1 0,8 - 1,5 mm	00 Standard Suffix
	02 Square 7	2 Chrome plated		2 1,6 - 2,5 mm	
	05 Square 8	6 Black powder coated		3 2,6 - 3,5 mm	
	07 Square 8 / slotted				
	11 Square 8 / Recessed				
	14 Triangle 7				
	15 Triangle 8				
	16 Triangle 10				
	22 Double bit 3				
	24 Double bit 5				
	26 Slotted				
	29 Slotted, Recessed				
	32 Hexagon 11				
	34 Recessed Hexagon 8				
	35 Recessed Hexagon 10				
	36 Recessed Hex 8 / 3 mm pin				
	80 Keyed to Differ				
	81 Keyed alike IL101				
	82 Keyed alike IL0333				
	83 For profile cylinder				
90 Push Button					

Version C

