

# VISIÓN INTERIOR



El sistema de cierre Vision Inside se instala dentro de la zona sellada y proporciona una compresión y un cierre suaves. Cumple con IP65 cuando se utiliza con una manija giratoria Vision. El mecanismo de control puede equiparse con una leva estándar adicional junto con un adaptador para el punto de cierre central. El mecanismo de control se entrega montado con una varilla plana y los puntos de cierre se piden por separado.



## MATERIAL

**Control mechanism:** Glass fibre reinforced polyamide (PA6GF30)

**Rod:** Stainless steel 304

## RELATED PRODUCTS


**Handles:** 1-004.04, 1-006.01, 1-002.02, 1-005.10, 1-006.50, 1-002.01, 6-010, 1-002.03, 1-006.03, 1-002.08, 1-007

**Rods:** 1-008.05/13

**Accessories:** 1-008.13

**Needed components for a complete system:** 1-008.13

Use the Index Code at [industrilas.com](http://industrilas.com)

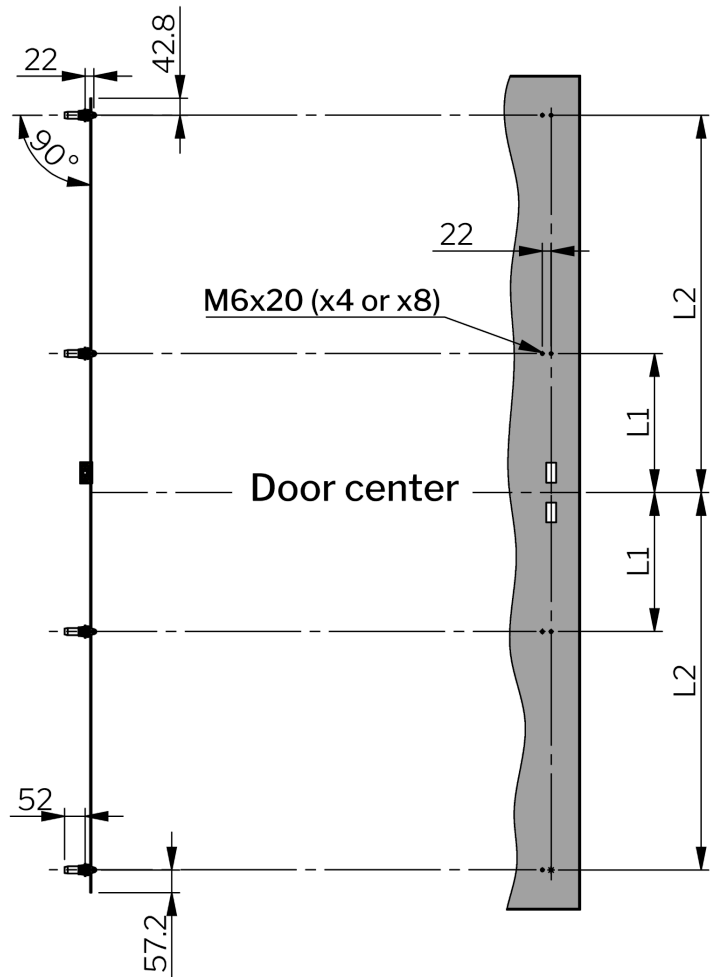

**celator**

**Make your selections in each column to create your article number (AAAA-BBBB-CCCC)**

AAAA	Material rod	Material control mechanism	BBBB	Rod system	CCCC	L in mm	L1 in mm	L2 in mm
1321	Steel, zinc plated	Zinc, zinc plated	1000	Vision Inside + Vision Outside	0500	500	200	-
1390	SS 316	Zinc, Delta seal			0900	700	300	-
1350	Steel, zinc plated	PA6GF30			1200	1500	400	-
1395	SS 316	PA6GF30			982	982	300	700
					1700	1700	300	800

