

## KLIMA-FLEX INTERLINK RODS

To operate two or more locking units with one handle, the rods can be connected with an interlink rod and rod links. The rod link clamps onto the interlink rod, enabling you to connect several latching units to one handle etc. Supplied in fixed lengths or custom lengths according to table. Special rod-lengths on request only.



### MATERIAL

**Rod:** Steel, zinc plated or stainless steel 304


### RELATED PRODUCTS

**Rod links:** 2-313b

Use the Index Code at [industrilas.com](http://industrilas.com)

### TECHNICAL INFORMATION

**Standards:** VDI 6022

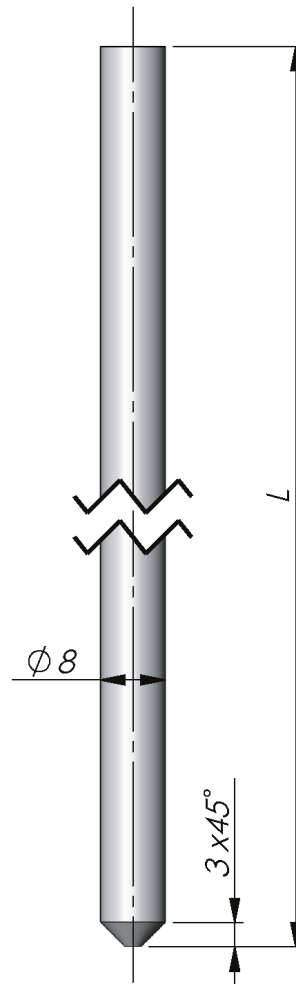

**celator**

P/N	Description	Material
282150-1000	L=1000 mm	Steel
282150-1100	L=1100 mm	Steel
282150-1200	L=1200 mm	Steel
282150-1300	L=1300 mm	Steel
282150-1400	L=1400 mm	Steel
282150-1500	L=1500 mm	Steel
282150-1600	L=1600 mm	Steel
282150-1700	L=1700 mm	Steel
282150-900	L=900 mm	Steel
282150-L	L = Custom rod length in mm	Steel
283050-1000	L=1000 mm	Stainless steel 304
283050-1100	L=1100 mm	Stainless steel 304
283050-1200	L=1200 mm	Stainless steel 304
283050-1300	L=1300 mm	Stainless steel 304
283050-1400	L=1400 mm	Stainless steel 304
283050-1500	L=1500 mm	Stainless steel 304
283050-1600	L=1600 mm	Stainless steel 304
283050-1700	L=1700 mm	Stainless steel 304
283050-900	L=900 mm	Stainless steel 304
283050-L	L = Custom rod length in mm	Stainless steel 304