


VISION SWING HANDLE STANDARD FOR 40 MM PROFILE CYLINDER



Low profile swing handle for 40 mm profile cylinder and control mechanism. Available in turn-to-latch version where the door is locked by turning the key.

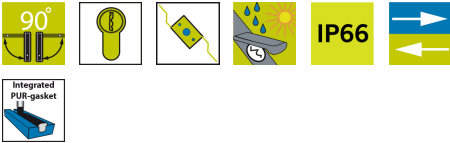

MATERIAL

Dish: Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)
Dust cover: TPE
Handle: Zinc die cast, black coated or fibre glass reinforced polyamide (PA6GF30)
Pivot shaft: Zinc die cast, zinc plated


RELATED PRODUCTS

Similar products: 1-002.02, 1-002.12
Rod latch systems: 1-008.04, 1-008.21, 1-008.25, 1-008.57, 1-002.01, 1-008.07
Cylinders: 1-209, 1-210, 1-211
Other materials: 6-010
 Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Cutout: Version C
 The dust cover adds 4.5 mm.

Standards: IP66, NEMA 4

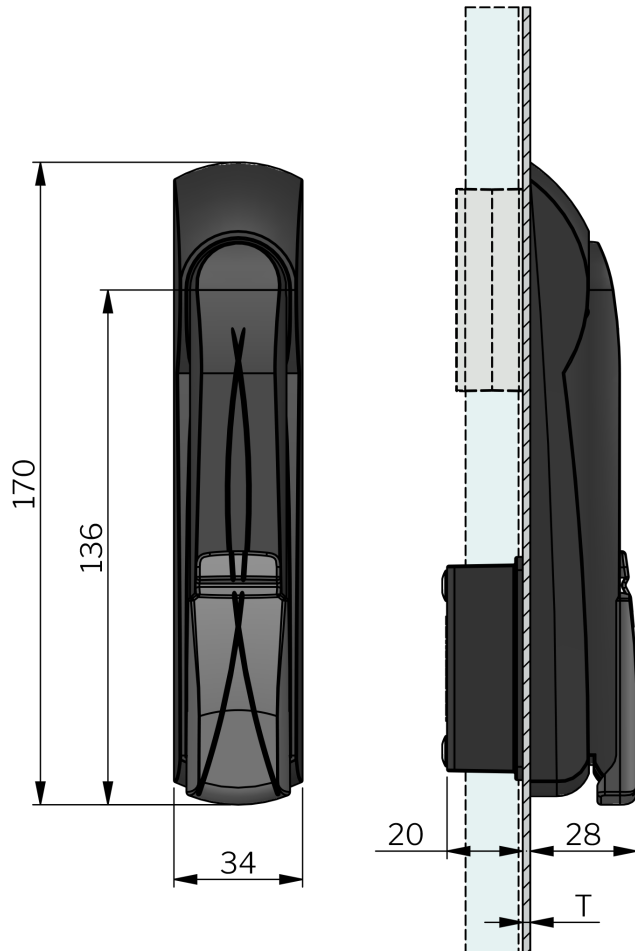

Make your selections in each column to create your article number (AAAAAAABC-DDDD)

AAAAAAA	Material	B	Door thickness T	C	PDL	DDDD	Dust cover
1216118	Handle zinc / dish PA6	1	0,8 - 1,5 mm	0	No	C60D	Yes
1216418	Handle zinc / dish zinc	2	1,6 - 2,5 mm			C60U	No
1250118	Handle PA6 / dish PA6	3	2,6 - 3,5 mm				

PDL = Spring loaded padlock loop retracts when handle is released.

Version C

