


VISION PLUG



The Vision Plug can be used with all Vision products designed for a 40 mm profile cylinder. It is used for either a tool operated insert or a key lock cylinder. The plug can be used as long-term solution as well as to keep the cabinet closed until the end user replace the plug with their own profile cylinder.

Both insert and cylinder version is spring loaded and goes back to closed position by itself after opening. Mounting screw is delivered with the plug.

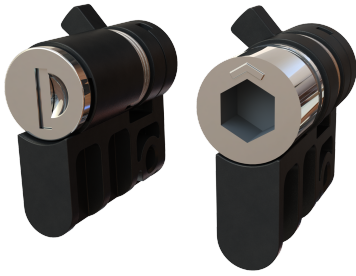

MATERIAL

Cylinder: Zinc die cast, stainless steel 304 cap and dust shutter

Housing: Glass fibre reinforced Polyamide (PA6GF30)

Insert: Zinc die cast, chrome plated or black powder coated

Screw: Steel, zinc plated

RELATED PRODUCTS

Handles: 1-005.10, 1-005.15, 6-020, 6-010, 1-002.02, 1-002.12

Keys: 2-372, 2-370

Use the Index Code at industrilas.com


TECHNICAL INFORMATION

Drawing A and B for ErgoLine.

Drawing C and D for swing handle.

Drawing E and F for lift handle.

Round cylinder version delivered with two keys.

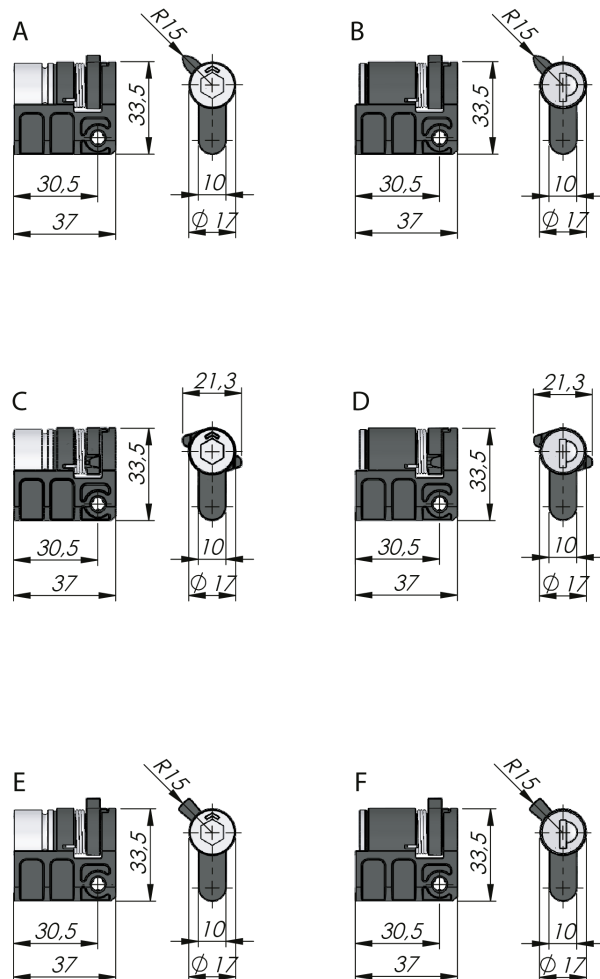

celator

Make your selections in each column to create your article number (AAAAAA-BCDD)

AAAAAA Housing		B For this product	C Surface treatment insert	DD Insert
511067	VISION Plug PA6 / Zinc inserts	5 Ergo Line [A-B]	0 For cylinder and push-button versions	01 Square 6
		6 Swing handle [C-D]	2 Chrome plated	03 Square 7
		7 Lift handle [E-F]	6 Black powder coated	05 Square 8
				07 Square 8 / slotted
				11 Square 8 / recessed
				14 Triangle 7
				15 Triangle 8
				16 Triangle 10
				22 Double Bit 3
				24 Double Bit 5
				26 Slotted
				29 Slotted recessed
				32 Hexagon 11
				34 Recessed hexagon 8
				35 Recessed hexagon 10
				36 Recessed hex 8 / 3 mm pin
				80 Keyed to differ
				81 Keyed alike IL101
				82 Keyed alike IL0333