


# SEALING PROFILES ACCORDING TO VDI 6022



Most sealing profiles can be delivered as certified according to VDI 6022. These profiles are then hygienically accepted and manufactured from a soft solid EPDM compound, which minimize the microbacterial growth. This aspect is important especially in heating, ventilation and cooling equipment.

For EPDM self-adhesive E-profiles in VDI 6022-quality, see table below. These profiles are available in a variety of sizes. Contact us with your questions and requirements and we will help you!




**MATERIAL**

Colour: Black

**TECHNICAL INFORMATION**

Standards: VDI 6022

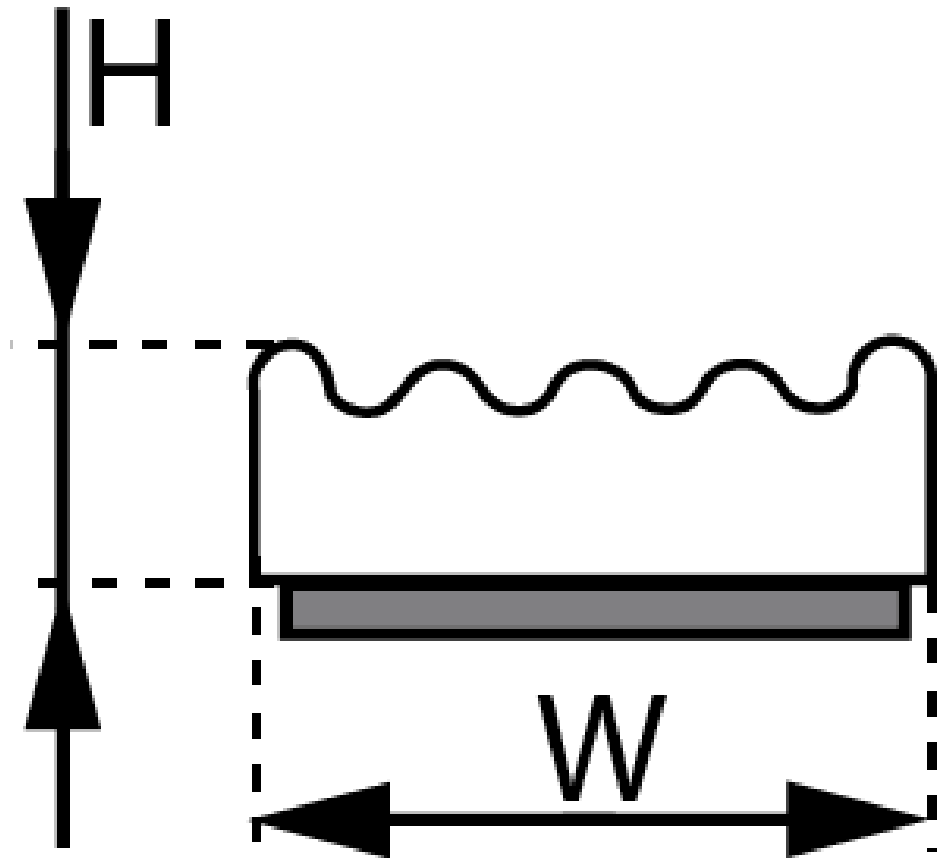

P/N	Description	Colour	Dimension W x H	Approval	Coil size	Length / carton
4504121-0	E-profile	Black	15 x 4 mm	VDI 6022	100 m	600 m
4504151-0	E-profile	Black	20 x 4 mm	VDI 6022	50 m	300 m

**Sealing Profiles Approved to VDI 6022**

<b>Properties</b>	<b>Solid EPDM</b>
Hardness	Shore 50A - Shore 60A
Color	Black
Temperature range	-40°C to +100°C
Ozone resistance	Very good
Weather resistance	Very good
Chemical resistance	Very good