


SEALING PROFILES ACCORDING TO VDI 6022




Most sealing profiles can be delivered as certified according to VDI 6022. These profiles are then hygienically accepted and manufactured from a soft solid EPDM compound, which minimize the microbacterial growth. This aspect is important especially in heating, ventilation and cooling equipment.

For EPDM self-adhesive E-profiles in VDI 6022-quality, see table below. These profiles are available in a variety of sizes. Contact us with your questions and requirements and we will help you!



MATERIAL
Colour: Black

TECHNICAL INFORMATION
Standards: VDI 6022

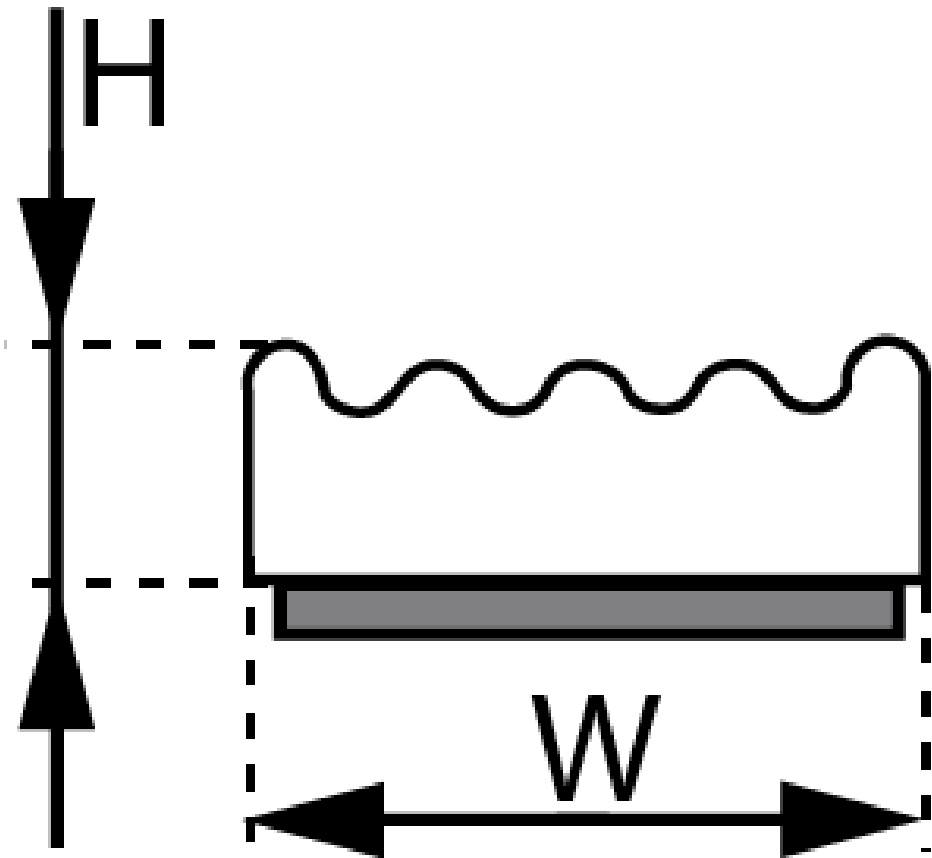

| P/N | Description | Colour | Dimension W x H | Approval | Coil size | Length / carton |
|-----------|-------------|--------|-----------------|----------|-----------|-----------------|
| 4504121-0 | E-profile | Black | 15 x 4 mm | VDI 6022 | 100 m | 600 m |
| 4504151-0 | E-profile | Black | 20 x 4 mm | VDI 6022 | 50 m | 300 m |

Sealing Profiles Approved to VDI 6022

| Properties | Solid EPDM |
|---------------------|-----------------------|
| Hardness | Shore 50A - Shore 60A |
| Color | Black |
| Temperature range | -40°C to +100°C |
| Ozone resistance | Very good |
| Weather resistance | Very good |
| Chemical resistance | Very good |